

GRASS CUTTING MACHINE WHEEL WITH TORSION SPRING

Optionals for shredders


HYDRAULIC GRASS CUTTING WHEEL, WITH WIND-UP MECHANICAL SHIFT

FOR THE SERIES
TR8 -TR8V - TR9 - TR9V - TR10 - TR10V

The grass cutting weel allows a good cleaning of grass in a inter-row way, working between plants.
It allows to achieve a finely cut.
It is also available in the version with hydraulic sensing lever.

There are two models available:

- **RTE D.450 MT** with a diameter of **45 cm**
- **RTE D.670 MT** with a diameter of **67 cm**

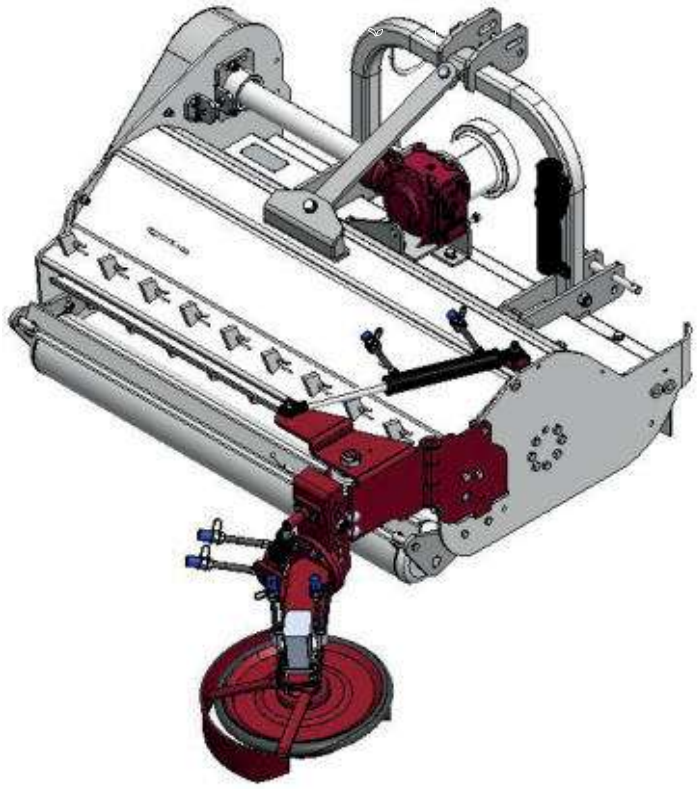

STANDARD EQUIPMENT

- Connection kit of your choice for models
  - TR8 / TR8V
  - TR9 / TR9V
  - TR10 / TR10V
- Manual wheel return system

OPTIONAL REQUESTS


- Independent lever-operated hydraulic system consisting of distributor, pump and tank (strongly recommended)
- Mower returned wheel kit by hydraulic piston (from tractor power supply)
- Mower wheel inclination kit by hydraulic piston (from tractor power supply)

N.B.

For having the machine wheel working with its accessories, two pairs of hydraulic double effect quick release couplings if a shredder with hydraulic shift is used, you need three couples of double-effect in addition to the one effect quick release coupling.

TECHNICAL FEATURES


GRASS CUTTING MACHINE WHEEL WITH TORSION SPRING

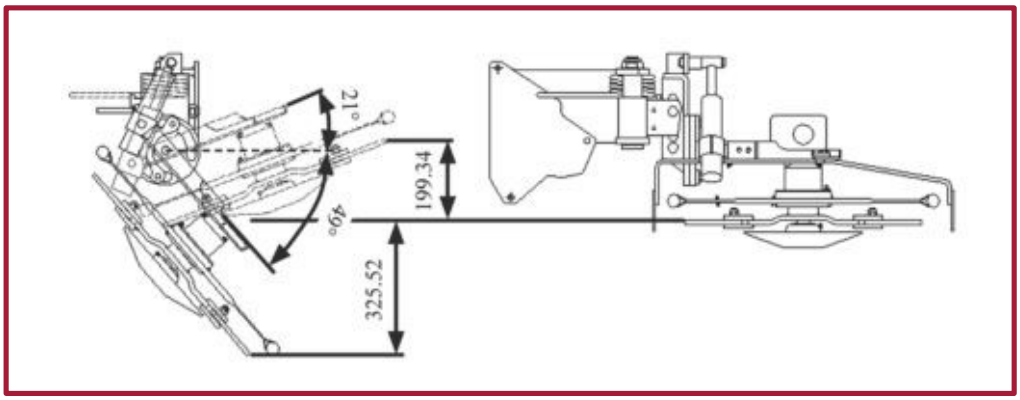

- Hydraulic mower wheel with small piston for regulating the inclination



- Hydraulic mower wheel with wind-up mechanical shift

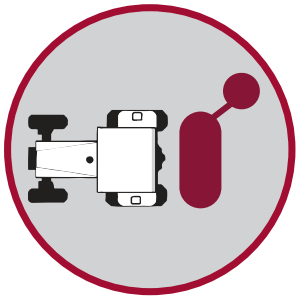

© Copyright 20/07/2022 - Rev. 02/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apporre modiche senza preavviso. // The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements // Los datos son puramente indicativos y sin compromiso.



GRASS CUTTING MACHINE WHEEL WITH HYDRAULIC FEELER PIN

Optionals for shredders


HYDRAULIC WHEEL GRASS CUTTING MACHINE WITH HYDRAULIC ADJUSTMENT

FOR THE SERIES
TR8 -TR8V - TR9 - TR9V

The grass cutting weel allows a good cleaning of grass in a inter-row way, working between plants.
It allows to achieve a finely cut.
Also available in a torsion spring model.

There is a model available:

- **RTE D.670 TI** with a diameter of **67 cm**

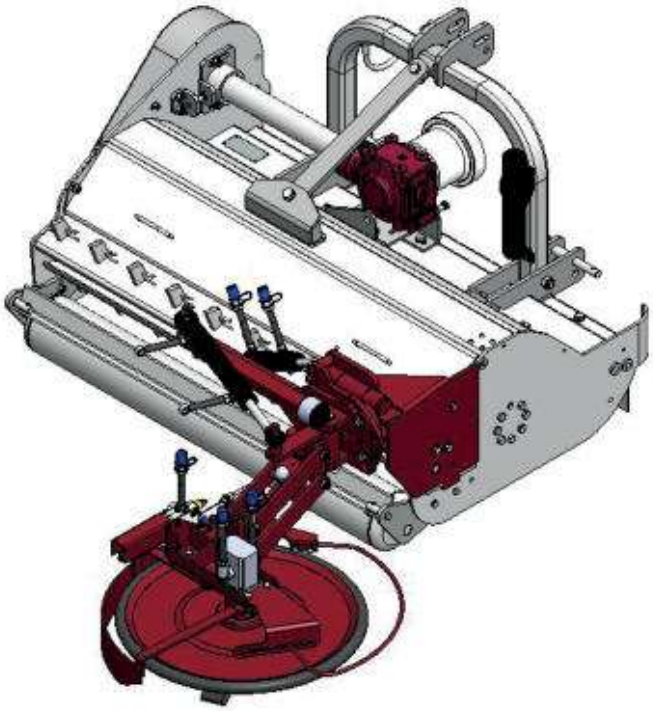

STANDARD EQUIPMENT

- Connection kit of your choice for models
  - TR8 / TR8V
  - TR9 / TR9V
  - TR10 / TR10V
- Return piston for the grass cutting wheel with control on the hydraulic PTO of the tractor

OPTIONAL REQUESTS


- Independent hydraulic system consisting of a pair of distributors, double pump and tank(strongly recommended)
- Heat exchanger with fan cooling for hydraulic system (recommended)
- Mower wheel agjustment kit by hydraulic piston (from tractor power supply)
- Mower wheel inclination kit by hydraulic piston (from tractor power supply)

N.B.


For having the machine wheel working with its accessories, two pairs of hydraulic double effect quick release couplings are required.
If a shredder with hydraulic shift is used, you need three couples of double-effect quick realease couplings.

TECHNICAL FEATURES


GRASS CUTTING MACHINE WHEEL WITH HYDRAULIC FEELER PIN

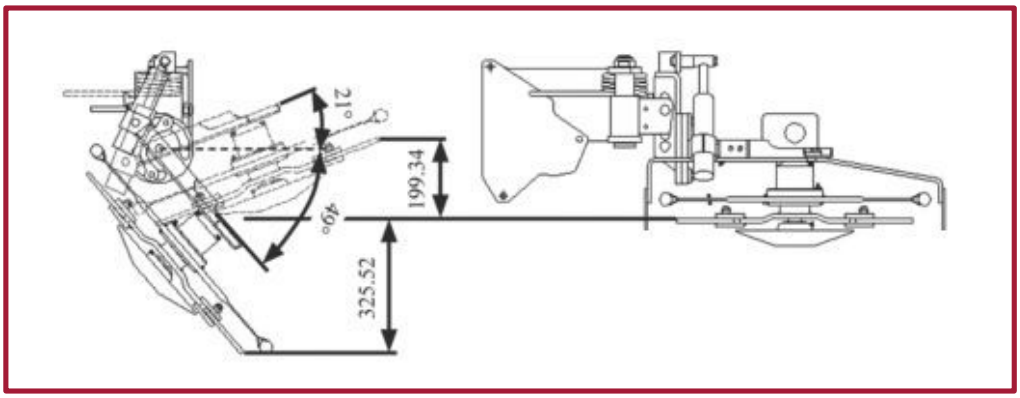

- Hydraulic mower wheel with small piston for regulating the inclination

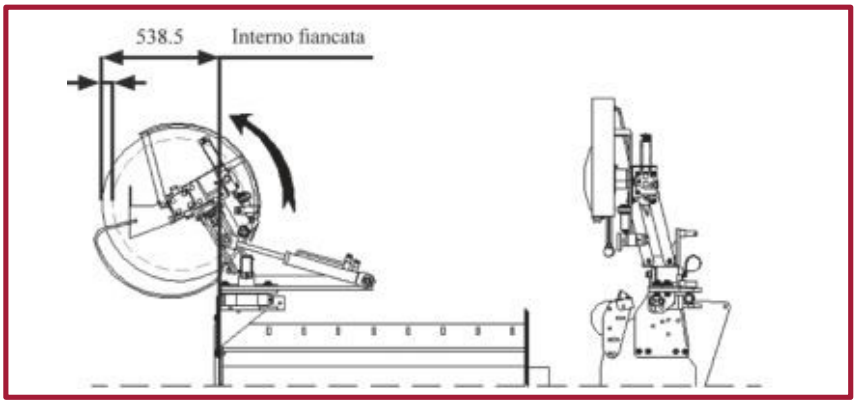

- Hydraulic mower wheel with hydraulic sensing lever



© Copyright 20/07/2022 - Rev. 02/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apporre modiche senza preavviso. // The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements // Los datos son puramente indicativos y sin compromiso.