

SERIES **105 - 105 F - 105 V**

hp 24-45 / kW 18-35


MEDIUM-WEIGHT SPADER WITH 3 SPEED LEVER OPERATED CHANGE

The 105 series includes machines with medium range features, and are perfect for working in vineyards, in fruit-farms, in truck-farming, etc., even in conditions of hard soil. They're equipped with with 3 speed lever change and external/internal saddles for regulating the working depth.







3 SPEED LEVER CHANGE



EXTERNAL FRAME SUPPORTS

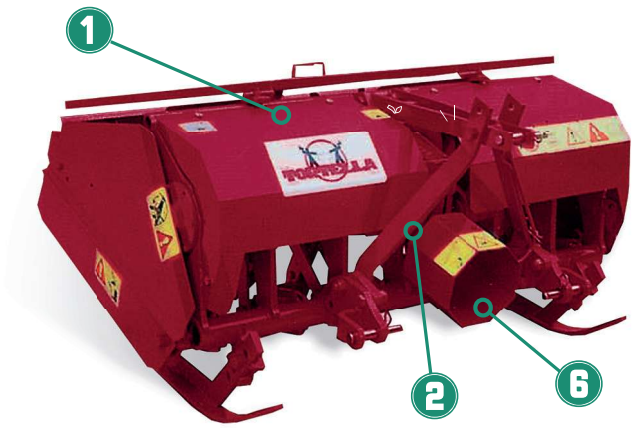

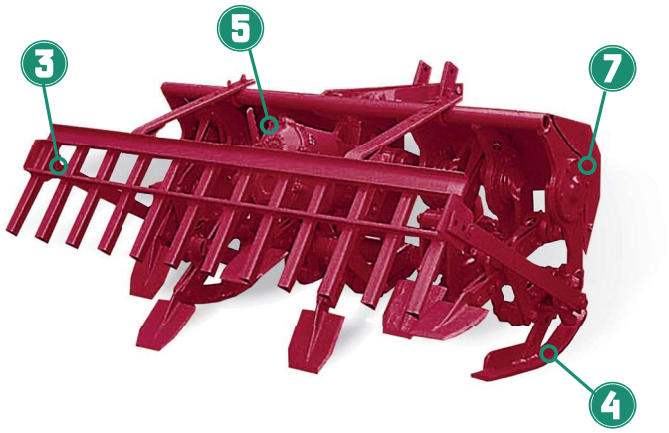

STANDARD EQUIPMENT

1. CE safety device
2. 3 point linkage
3. Dump rake
4. 3 speed settings, lever-operated
5. External frame supports
6. External/internal depth regulating saddles
7. Hydraulic shift 20cm left and 20cm right (mod. 205 V)
8. Hydraulic shift 40cm only right (mod. 205 F)
9. Power take-off P.T.O. 540 rpm

OPTIONAL REQUEST

- Levelling cover in place of the dump rake from 100 to 145
- Lift extensions
- Joint with clutch
- Rear PTO
- Power take-off P.T.O. 1000 rpm

TECHNICAL FEATURES

105 - 105 F - 105 V
hp 24-45 / kW 18-35

BROAD TECHNICAL DATA

MODEL	MAX. SPACE WIDTH		REAL WORKING WIDTH		SHIFT WITH REGARD TO THE CENTRE LINE OF THE TRACTOR				RECOMMENDED POWER OF TRACTOR		MAX. WORKING DEPTH		TOTAL N. OF SPADES	TOTAL WEIGTH OF THE MACHINE WITH STANDARD EQUIPMENT	
	cm	in	cm	in	cm		in		hp	Kw	cm	in	n.	Kg	lib
105-100	99	39	92	36	46	46	18	18	25/35	18/26	25	10	4	355	781
105-120	132	52	124	49	62	62	24	24	30/35	22/26	25	10	6	460	1012
105-130	136	53	130	51	65	65	26	26	30/35	22/26	25	10	6	500	1100
105-145	151	59	140	55	70	70	28	28	30/35	22/26	25	10	6	520	1144
105-170	177	70	168	66	84	84	33	33	35/45	26/35	25	10	8	600	1320
115-130	136	53	130	51	45	85	18	33	30/35	22/26	25	10	6	500	1100
105 F - MODEL WITH HYDRAULIC SHIFT 40 CM ONLY RIGHT															
105-100 F	99	39	92	36	46	46	18	18	25/35	18/26	25	10	4	355	781
105-120 F	132	52	124	49	62	62	24	24	30/35	22/26	25	10	6	460	1012
105-130 F	136	53	130	51	65	65	26	26	30/35	22/26	25	10	6	500	1100
105-145 F	151	59	140	55	70	70	28	28	30/35	22/26	25	10	6	520	1144
105-170 F	177	70	168	66	84	84	33	33	35/45	26/35	25	10	8	600	1320
105 V - MODEL WITH HYDRAULIC SHIFT 20 CM LEFT AND 20 CM RIGHT															
105-100 V	99	39	92	36	46	46	18	18	25/35	18/26	25	10	4	355	781
105-120 V	132	52	124	49	62	62	24	24	30/35	22/26	25	10	6	460	1012
105-130 V	136	53	130	51	65	65	26	26	30/35	22/26	25	10	6	500	1100
105-145 V	151	59	140	55	70	70	28	28	30/35	22/26	25	10	6	520	1144
105-170 V	177	70	168	66	84	84	33	33	35/45	26/35	25	10	8	600	1320

© Copyright 02/11/22 - Rev. 02/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apporre modifiche senza preavviso. // The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements // Los datos son puramente indicativos y sin compromiso.