

SERIES 205

hp 30-75 / kW 22-55

HEAVY SPADER
WITH 3 SPEED LEVER OPERATED CHANGE


The 205 series includes all machines of the heavy range that are suitable for being used in all types of farming. The layout and the heaviness of the frame make possible to reach good working depths and to avoid soil obstruction in case of high humidity. They're equipped with 3 speed lever operated change.



3 SPEED LEVER CHANGE



EXTERNAL FRAME SUPPORTS

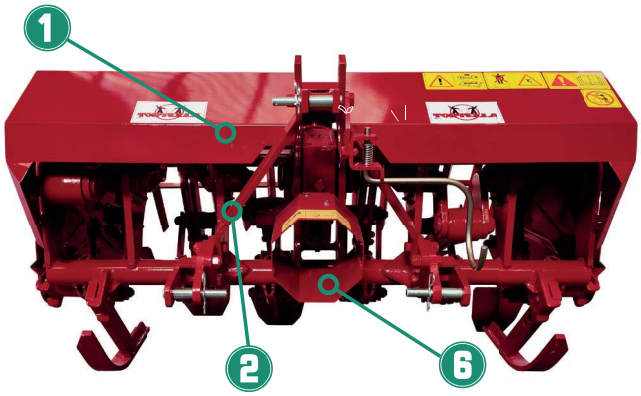



STANDARD EQUIPMENT

1. CE safety device
2. 3 point linkage
3. Dump rake
4. 3 speed lever change
5. External frame supports
6. External/internal depth regulating saddles
7. Power take-off P.T.O. 540 rpm

OPTIONAL REQUESTS


- Levelling cover in place of the dump rake
- Depth regulating wheels for models 170-190-200
- Transfer wheels
- Difference of spader for artichokes model 170
- Power take-off P.T.O. 1000 rpm
- Rear PTO
- Joint with clutch

TECHNICAL FEATURES

205
hp 30-75 / kW 22-55

BROAD TECHNICAL DATA

MODEL	MAX. SPACE WIDTH		REAL WORKING WIDTH		SHIFT WITH REGARD TO THE CENTRE LINE OF THE TRACTOR				RECOMMENDED POWER OF TRACTOR		MAX. WORKING DEPTH		TOTAL N. OF SPADES	TOTAL WEIGTH OF THE MACHINE WITH STANDARD EQUIPMENT	
	cm	in	cm	in	cm		in		hp	Kw	cm	in	n.	Kg	lib
205-100	109	43	100	39	50	50	20	20	30/50	22/36	30	12	4	420	924
205-120	133	52	120	47	60	60	24	24	30/70	22/52	30	12	6	550	1210
205-135	144	57	137	54	68	69	27	27	35/70	25/52	30	12	6	581	1278
205-145	152	60	145	57	72	73	28	29	35/70	25/52	30	12	6	600	1320
205-160	162	64	155	61	77	78	30	31	35/70	25/52	30	12	6	620	1364
205-165	173	68	165	65	82	83	32	33	35/70	25/52	30	12	6	630	1386
205-170	180	71	175	69	87	88	34	35	35/75	25/56	30	12	8	760	1672
205-190	195	77	190	75	95	95	37	37	50/75	36/56	30	12	8	820	1804
205-200	209	82	200	79	100	100	39	39	50/75	36/56	30	12	8	880	1936
215-145	152	60	145	57	55	90	22	35	35/70	25/52	30	12	6	600	1320



© Copyright 02/11/22 - Rev. 02/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apporre modifiche senza preavviso. // The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements // Los datos son puramente indicativos y sin compromiso.



TORNELLA

SERIES 205 F - 205 V

hp 30-75 / kW 22-55

HEAVY SPADER WITH WITH HYDRAULIC SHIFT AND 3 SPEED LEVER OPERATED CHANGE

The 205 series includes all machines of the heavy range that are suitable for being used in all types of farming. The layout and the heaviness of the frame make possible to reach good working depths and to avoid soil obstruction in case of high humidity. They're equipped with 3 speed lever operated change.



3 SPEED LEVER CHANGE



EXTERNAL FRAME SUPPORTS





STANDARD EQUIPMENT

1. CE safety device
2. 3 point linkage
3. Dump rake
4. 3 speed lever change
5. External/internal depth regulating saddles
6. External frame supports
7. Hydraulic shift 20cm left and 20cm right (mod. 205 V)
8. Hydraulic shift 40cm only right (mod. 205 F)
9. Power take-off P.T.O. 540 rpm

OPTIONAL REQUESTS

- Levelling cover in place of the dump rake
- Depth regulating wheels for models 170-190-200
- Transfer wheels
- Difference of spader for artichokes model 170
- Rear PTO
- Power take-off P.T.O. 1000 rpm
- Joint with clutch

TECHNICAL FEATURES

205 F - 205 V
hp 30-75 / kW 22-55

MODEL	MAX. SPACE WIDTH		REAL WORKING WIDTH		SHIFT WITH REGARD TO THE CENTRE LINE OF THE TRACTOR				RECOMMENDED POWER OF TRACTOR		MAX. WORKING DEPTH		TOTAL N. OF SPADES	TOTAL WEIGTH OF THE MACHINE WITH STANDARD EQUIPMENT	
	cm	in	cm	in	cm		in		hp	Kw	cm	in	n.	Kg	lib
205 F - MODEL WITH HYDRAULIC SHIFT 40 CM ONLY RIGHT															
205-100 F	109	43	100	39	50	50	20	20	30/50	22/36	30	12	4	420	924
205-120 F	133	52	120	47	60	60	24	24	30/70	22/52	30	12	6	550	1210
205-135 F	144	57	137	54	68	69	27	27	35/70	25/52	30	12	6	581	1278
205-145 F	152	60	145	57	72	73	28	29	35/70	25/52	30	12	6	600	1320
205-160 F	162	64	155	61	77	78	30	31	35/70	25/52	30	12	6	620	1364
205-165 F	173	68	165	65	82	83	32	33	35/70	25/52	30	12	6	630	1386
205-170 F	180	71	175	69	87	88	34	35	35/75	25/56	30	12	8	760	1672
205-190 F	195	77	190	75	95	95	37	37	50/75	36/56	30	12	8	820	1804
205-200 F	209	82	200	79	100	100	39	39	50/75	36/56	30	12	8	880	1936
205 V - MODEL WITH HYDRAULIC SHIFT 20 CM LEFT AND 20 CM RIGHT															
205-100 V	109	43	100	39	50	50	20	20	30/50	22/36	30	12	4	420	924
205-120 V	133	52	120	47	60	60	24	24	30/70	22/52	30	12	6	550	1210
205-135 V	144	57	137	54	68	69	27	27	35/70	25/52	30	12	6	581	1278
205-145 V	152	60	145	57	72	73	28	29	35/70	25/52	30	12	6	600	1320
205-160 V	162	64	155	61	77	78	30	31	35/70	25/52	30	12	6	620	1364
205-165 V	173	68	165	65	82	83	32	33	35/70	25/52	30	12	6	630	1386
205-170 V	180	71	175	69	87	88	34	35	35/75	25/56	30	12	8	760	1672
205-190 V	195	77	190	75	95	95	37	37	50/75	36/56	30	12	8	820	1804
205-200 V	209	82	200	79	100	100	39	39	50/75	36/56	30	12	8	880	1936

© Copyright 02/11/22 - Rev. 02/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apporre modifiche senza preavviso.
// The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements // Los datos son puramente indicativos y sin compromiso.