

SERIES **305 - 305 F - 305 V**


hp 50-110/kW 36-81

REINFORCED HEAVY SPADER
WITH 3 SPEED LEVER OPERATED CHANGE


The 305 series includes all reinforced heavy and high reliable machines, that can be used for digging in case of a very hard and difficult soil. It includes all models with a working width until 3m, with 3 speed lever operated change.




3 SPEED LEVER CHANGE

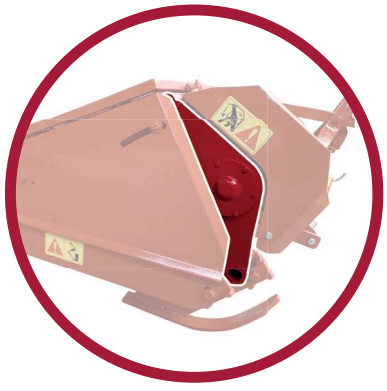


EXTERNAL FRAME SUPPORTS

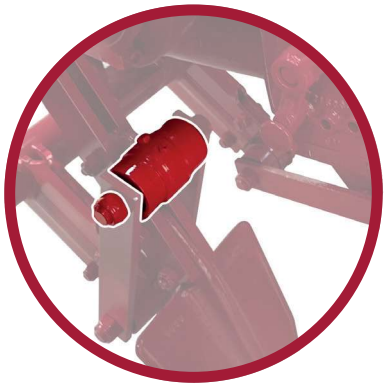

SUPPORTS WITH 4 BEARINGS

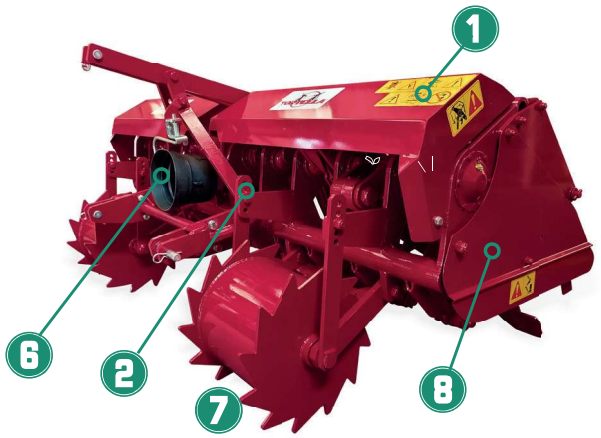

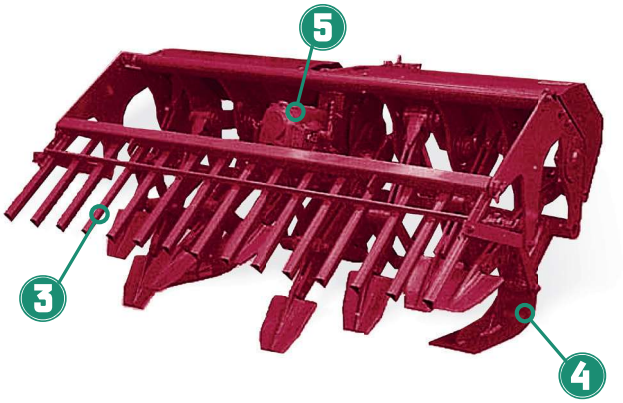

STANDARD EQUIPMENT

1. CE safety device
2. 3 point linkage
3. Dump rake
4. 3 speed lever change
5. External frame supports
6. Depth regulating wheels for models 230/250/300
7. Depth regulating saddles for models 150/170/190/200
8. Hydraulic shift 20cm left and 20cm right (mod. 205 V)
9. Hydraulic shift 40cm only right (mod. 205 F)
10. Power take-off P.T.O. rpm

OPTIONAL REQUESTS

- Levelling cover in place of the dump rake
- Transfer wheels for models 150-170
- Depth regulating wheels for models 170-200
- Difference of spader for artichokes model 170-190
- Hydraulic shift 20cm left and 20cm right for models from 150 to 200
- Hydraulic shift 40cm only right for models from 150 to 200
- Rear PTO
- Power take-off PTO 1000 rpm
- Joint with clutch
- Extended third-point plates for tractors with short PTO

TECHNICAL FEATURES

305 - 305 F - 305 V
hp 50-110 / kW 36-81

BROAD TECHNICAL DATA

MODEL	MAX. SPACE WIDTH		REAL WORKING WIDTH		SHIFT WITH REGARD TO THE CENTRE LINE OF THE TRACTOR				RECOMMENDED POWER OF TRACTOR		MAX. WORKING DEPTH		TOTAL N. OF SPADES	TOTAL WEIGTH OF THE MACHINE WITH STANDARD EQUIPMENT	
	cm	in	cm	in	cm		in		hp	Kw	cm	in	n.	Kg	lib
305-150	158	62	150	59	75	75	30	30	50/90	36/67	30	12	6	675	1485
305-170	184	72	175	69	87	88	34	35	50/90	36/67	30	12	8	880	1936
305-190	196	77	190	75	95	95	37	37	50/100	36/74	30	12	8	900	1980
305-200	212	83	205	81	102	103	40	41	55/100	42/74	30	12	8	927	2039
305-230	236	93	230	90	115	115	45	45	70/110	51/81	30	12	10	1190	2618
305-250	265	103	255	100	127	128	50	50	70/110	51/81	30	12	10	1250	2750
305-300	314	123	300	118	150	150	59	59	90/110	66/81	30	12	12	1498	3296
315-150	158	62	150	59	60	90	24	35	50/90	36/67	30	12	6	675	1485
305 F - MODEL WITH HYDRAULIC SHIFT 40 CM ONLY RIGHT															
305-150 F	158	62	150	59	75	75	30	30	50/90	36/67	30	12	6	675	1485
305-170 F	184	72	175	69	87	88	34	35	50/90	36/67	30	12	8	880	1936
305-190 F	196	77	190	75	95	95	37	37	50/100	36/74	30	12	8	900	1980
305-200 F	212	83	205	81	102	103	40	41	55/100	42/74	30	12	8	927	2039
305 V - MODEL WITH HYDRAULIC SHIFT 20 CM LEFT AND 20 CM RIGHT															
305-150 V	158	62	150	59	75	75	30	30	50/90	36/67	30	12	6	675	1485
305-170 V	184	72	175	69	87	88	34	35	50/90	36/67	30	12	8	880	1936
305-190 V	196	77	190	75	95	95	37	37	50/100	36/74	30	12	8	900	1980
305-200 V	212	83	205	81	102	103	40	41	55/100	42/74	30	12	8	927	2039

© Copyright 02/11/22 - Rev. 02/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apporre modifiche senza preavviso. // The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements //Los datos son puramente indicativos y sin compromiso.