

SERIES **405**


hp 100-240/kW 73-179

SPADER FOR DEEP WORKING
WITH 3 SPEED LEVER OPERATED CHANGE

The 405 series Spaders have been thought to run in combination with high power tractors and let very deep soils, even in very hard conditions, been worked. They can be a perfect solution for contractors and big companies and for been used open fields. They can be distinguished by the high heavy-duty frame and, due to the rear PTO, can be combined with all machines for the preparation of the seeding without additional steps.



3 SPEED LEVER CHANGE

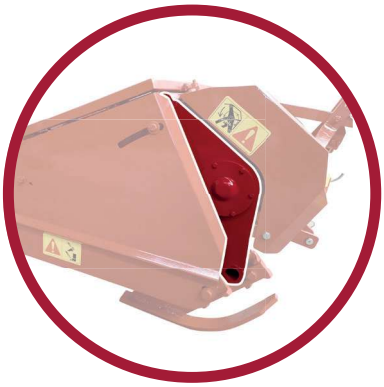

EXTERNAL FRAME SUPPORTS



KIT TRANSPORT CARRIAGE





STANDARD EQUIPMENT

1. CE safety device
2. 3 point linkage
3. Levelling dump rake
4. Dump rake adjusting screws
5. 3 speed lever change
6. External frame supports
7. Side bulkheads
8. Depth regulating wheels
9. Working wheels adjusting jacks
10. Power take-off P.T.O. 1000 rpm
11. Rear PTO for models

OPTIONAL REQUESTS

- Rear hydraulic 3 point linkage
- Kit 3 point linkage extensions
- Hydraulic jacks for dump rake regulating
- Rotosaddles in place of the working wheels
- Hydraulic jacks for depth wheels regulating
- Heat exchanger recommended for models 350/400
- Joint with ratchet limiter necessary for powers higher than 160hp
- Joint with ratchet limiter only for models 350/400
- Joint with clutch for models 185/250/300/315
- Kit transport carriage

TECHNICAL FEATURES

405
hp 100-240/kW 73-179

BROAD TECHNICAL DATA

MODEL	MAX. SPACE WIDTH		REAL WORKING WIDTH		SHIFT WITH REGARD TO THE CENTRE LINE OF THE TRACTOR				RECOMMENDED POWER OF TRACTOR		MAX. WORKING DEPTH		TOTAL N. OF SPADES	TOTAL WEIGTH OF THE MACHINE WITH STANDARD EQUIPMENT	
	cm	in	cm	in	cm		in		hp	Kw	cm	in	n.	Kg	lib
405-185	190	75	185	73	92	93	36	37	90/110	66/81	45	18	6	1447	3183
405-250	260	102	250	98	125	125	49	49	100/240	73/179	45	18	8	2120	4664
405-300	316	124	300	118	150	150	59	59	140/240	104/179	45	18	10	2415	5373
405-315	338	133	318	125	159	159	63	63	140/240	104/179	45	18	12	2480	5456
405-350	373	147	350	138	175	175	69	69	160/240	119/179	45	18	12	2688	5913
405-400	425	166	400	157	200	200	79	79	180/240	134/179	45	18	14	3062	6644

© Copyright 02/11/22 - Rev. 02/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apportare modifiche senza preavviso. // The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements // Los datos son puramente indicativos y sin compromiso.

