

TORNELLA


SERIES **T55**

hp 100-180/ kW 74-134


ROTARY CULTIVATOR WITH GEAR DRIVE

TheT55 series rotary cultivators are machines with gear drive and 3+3 speed lever change. They're perfect for the soil preparation with a high level of soil finishing. Their heaviness makes them perfect to work on hard and compact soils, and the structure of the frame and of the rear casing let working with low power consumption and without any flooding risk. They can be equipped with rotor with traditional hoes, or with drilled or straight blades rotor, and are arranged for the assembly of every kind of rear roll. These machines work in combination with medium-power tractors (up to 180 hp) and are pefect for contractors and medium companies.

TOOLS




CURVED HOES




90° ANGLE HOE




BLADES




SPIKES




JAG ROLL



CAGE ROLL




PACKER ROLL



SPIRAL ROLL



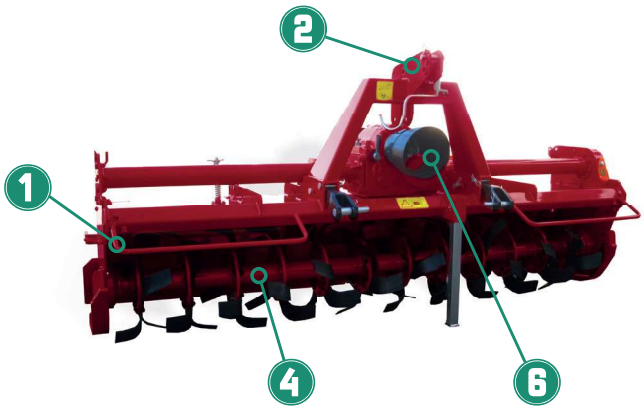

STANDARD EQUIPMENT

1. CE safety device
2. Oscillating 3 point linkage
3. Depth regulating saddles
4. 6 curved hoes for disc turned outwards
5. 3+3 speed lever change
6. Power take-off P.T.O. 1000 rpm
7. Rear PTO for models

ALTERNATIVES*

- Rotor with hoes pointed inwards
- 90° angle hoe

**Components supplied without any price difference in place of the standard equipment*

OPTIONAL REQUESTS


- Couple of Power supply discs
- Hydraulic jacks for rear roll regulating
- Door with door-push springs in place of the standards ones
- 3 point linkage with side bars
- Counterflanges
- Iron front wheels
- Iron side wheels
- Packer roll
- Mechanical rear 3 point linkage
- Hydraulic rear 3 point linkage with one piston
- Hydraulic rear 3 point linkage with two pistons
- Cardan joint with clutch

TECHNICAL FEATURES

T55
hp 100-180/ kW 74-134

BROAD TECHNICAL DATA

MODEL	MAX. SPACE WIDTH		REAL WORKING WIDTH		SHIFT WITH REGARD TO THE CENTRE LINE OF THE TRACTOR				RECOMMENDED POWER OF TRACTOR		MAX WORKING DEPTH		SPADES	SPIKES	TOTAL WEIGTH OF THE MACHINE WITH STANDARD EQUIPMENT	
	cm	in	cm	in	cm		in		hp	Kw	cm	in	Tot. n.	Tot. n.	Kg	lib
T55-230	248	98	230	91	115	115	45	45	100/150	74/112	22	9	9	43	1110	2447
T55-250	268	106	250	98	125	125	49	49	100/160	74/119	22	9	10	47	1146	2526
T55-280	298	117	280	110	140	140	55	55	130/180	97/134	22	9	11	59	1200	2646
T55-300	318	125	300	118	150	150	59	59	140/180	104/134	22	9	12	63	1240	2734



© Copyright 03/11/22 - Rev. 01/22 - I dati riportati sul seguente catalogo sono indicativi e non impegnativi; TORTELLA si riserva di apporre modifiche senza preavviso.
// The data supplied are purely indicative and in no Way binding. // Die gegebenen Daten sind rein hinweisend und nicht verbindlich. // Les éléments founi sont indicatives et non d'engagements // Los datos son puramente indicativos y sin compromiso.